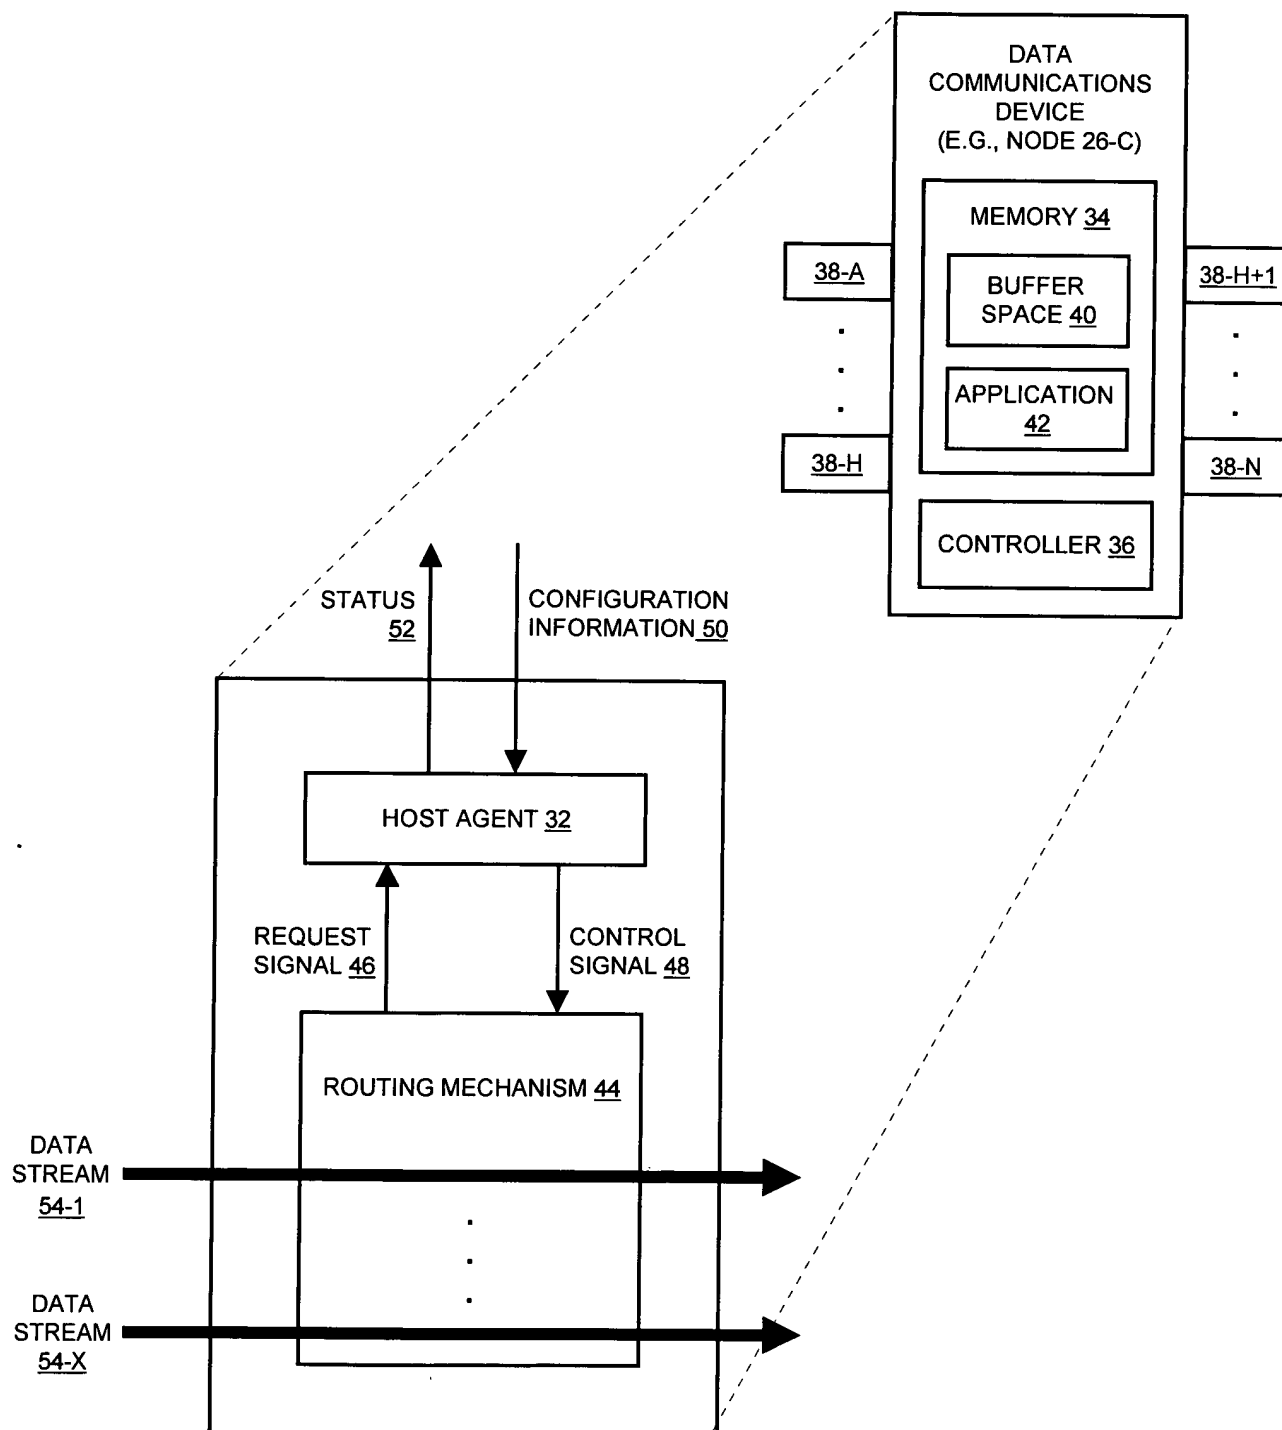


FIG. 1



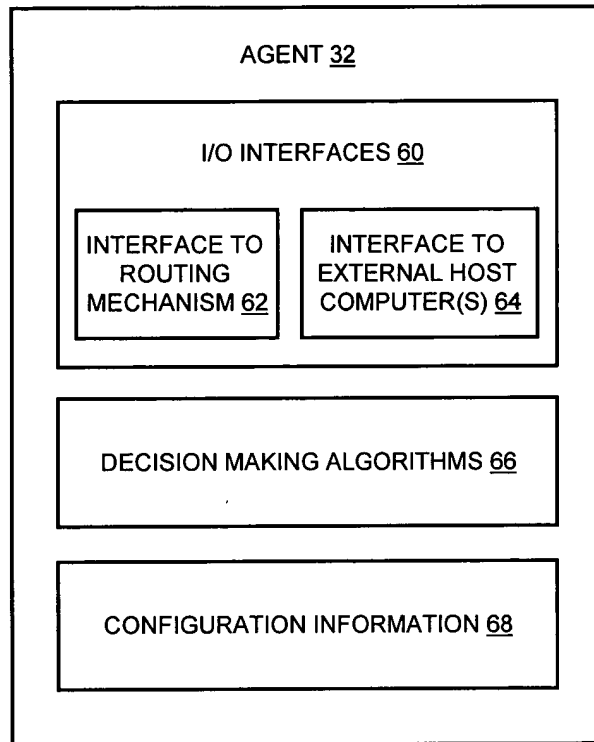


FIG. 3

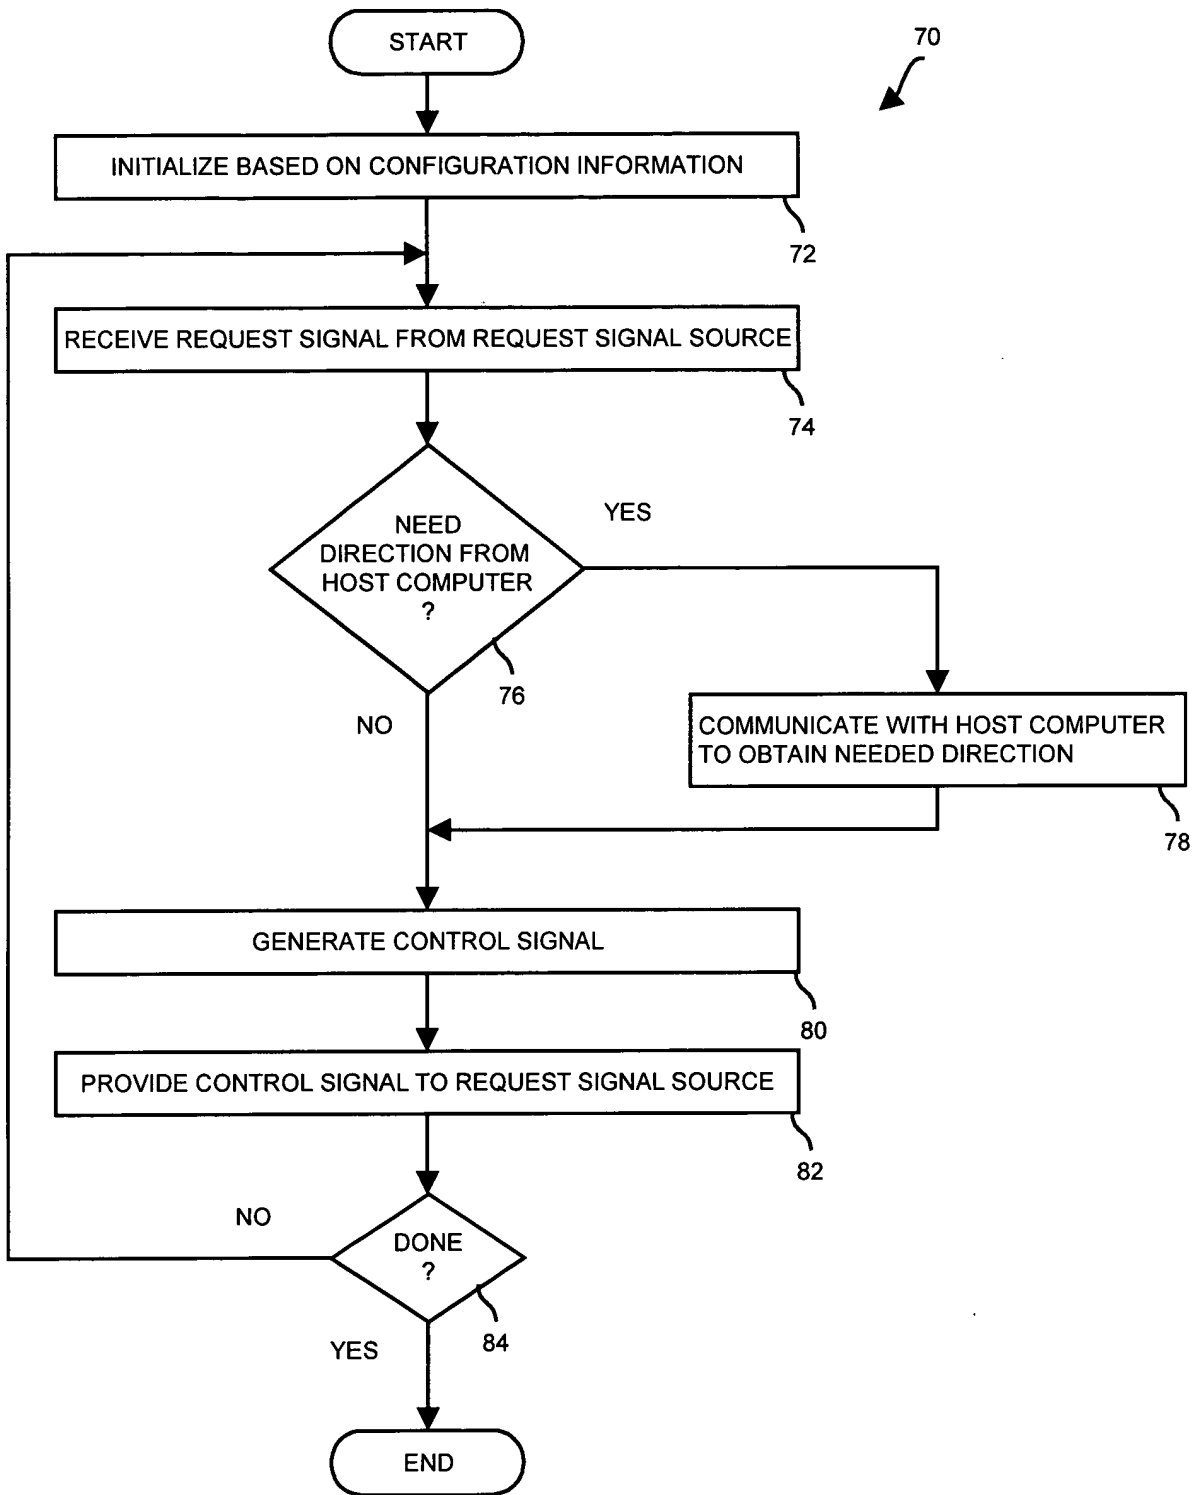


FIG. 4

ARRANGEMENT IN WHICH AGENT
ACTS ON BEHALF OF SENDING HOST

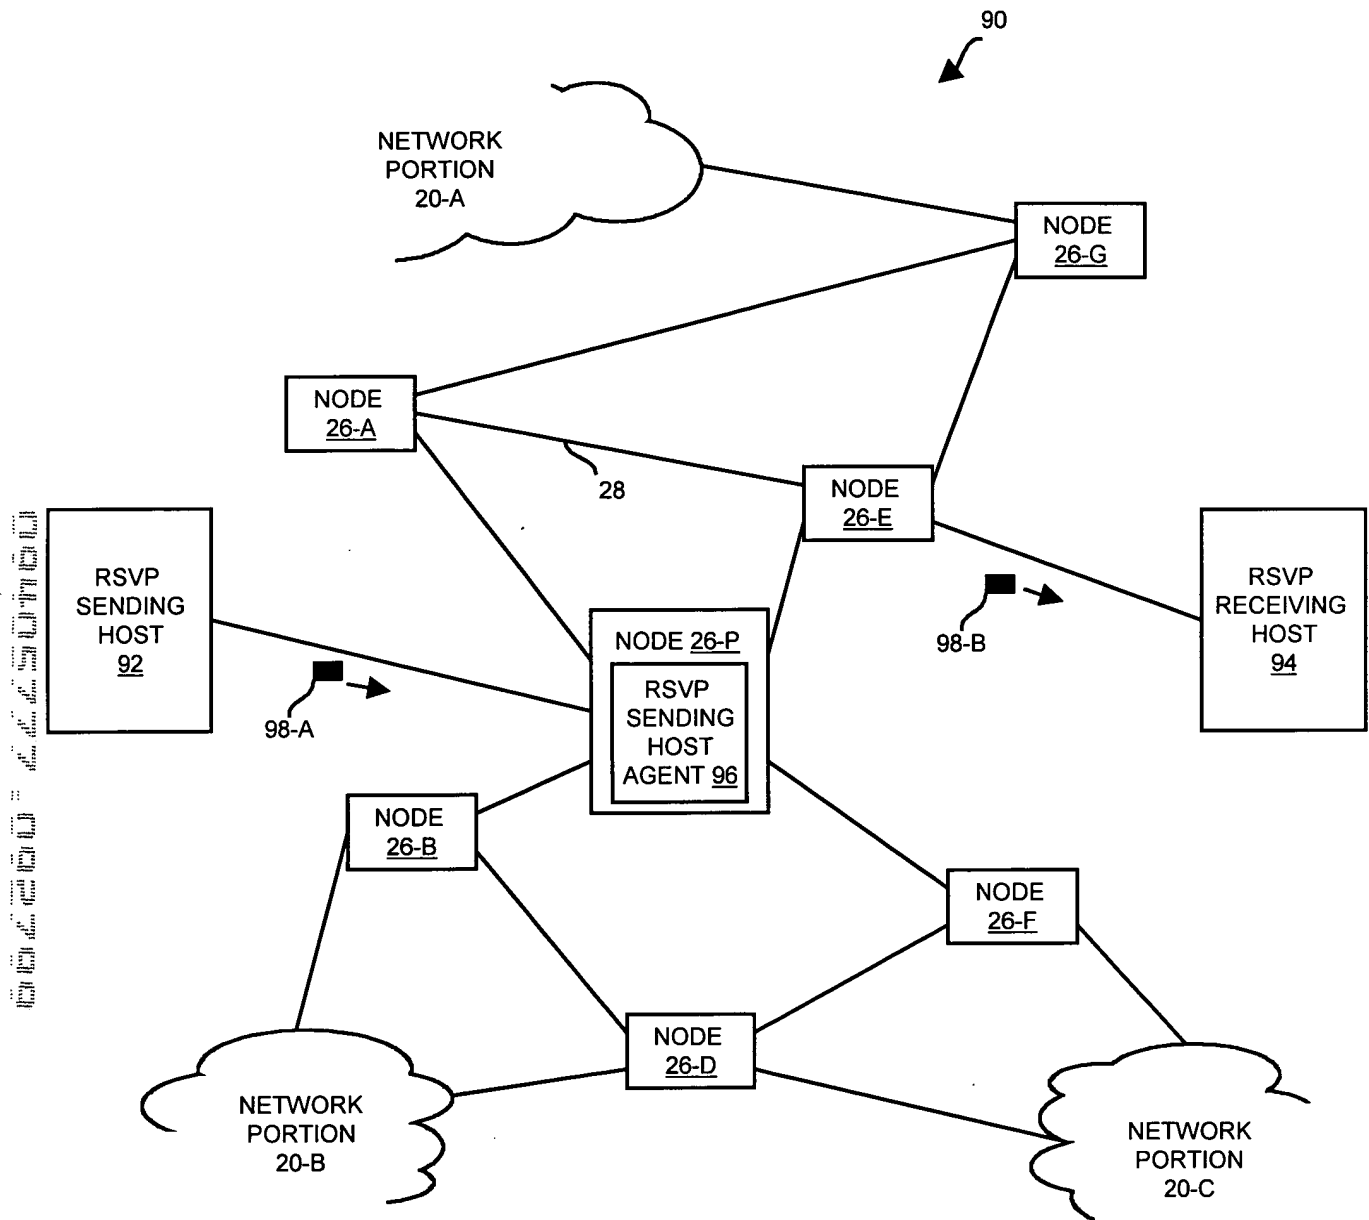


FIG. 5

ARRANGEMENT IN WHICH AGENT
ACTS ON BEHALF OF RECEIVING HOST

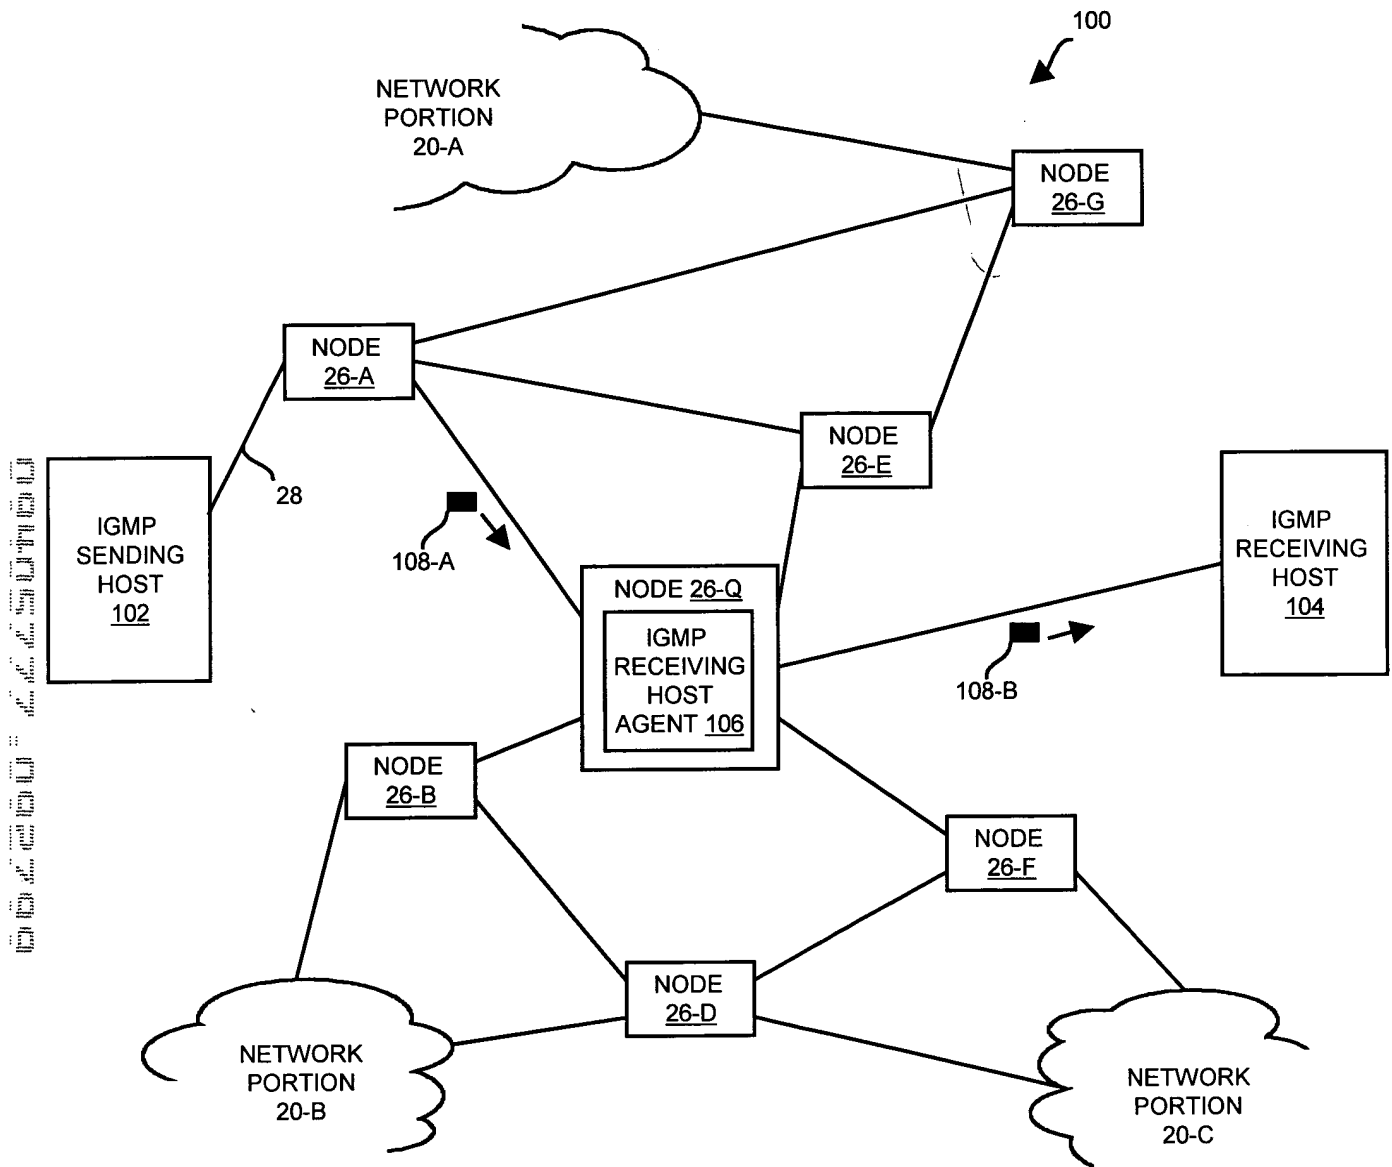


FIG. 6

ARRANGEMENT IN WHICH AGENT
RESIDES IN A NODE THAT IS DIFFERENT THAN
THE REQUEST SIGNAL SOURCE

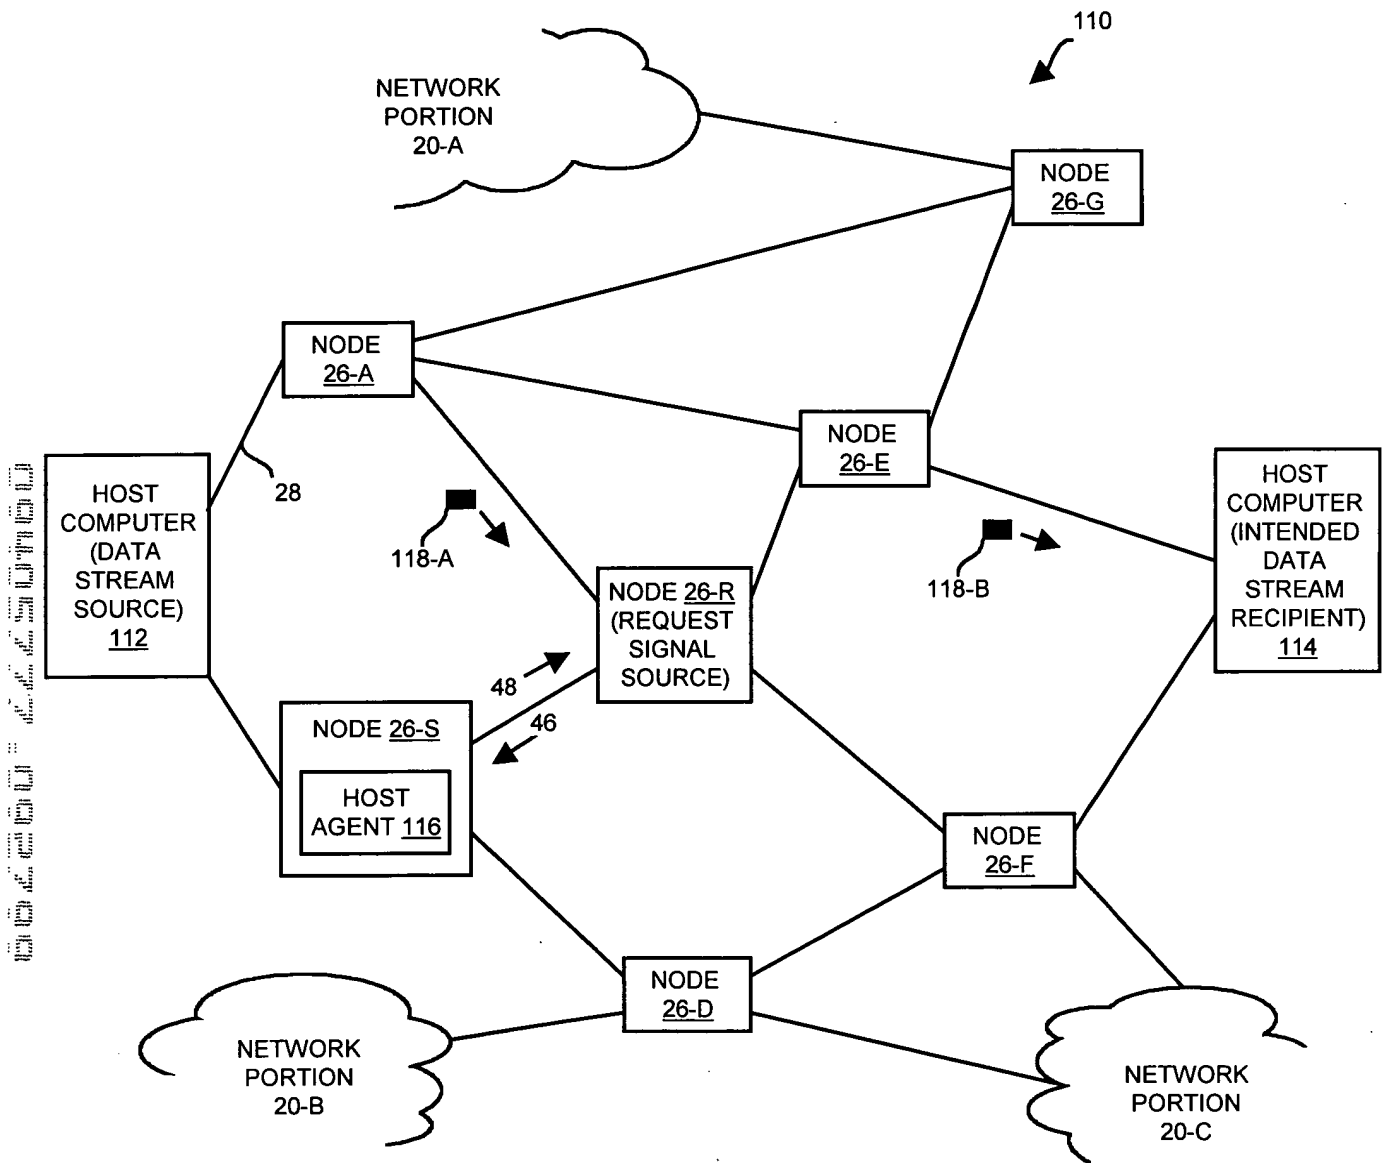


FIG. 7